




50* BOLT/WELD ON
PART #265


THE 50 DEGREE BOLT/WELD ON MAX COUPLER CAN BE BOLTED OR WELDED TO THE CHASSIS OF ANY STANDARD A-FRAME TRAILER BUILT TO THE INDUSTRY STANDARD OF 50 DEGREES.

WE RECOMMEND A MINIMUM OF THREE 3/8" GRADE 5 BOLTS PER SIDE WITH AS MUCH SPACING BETWEEN THEM AS POSSIBLE.

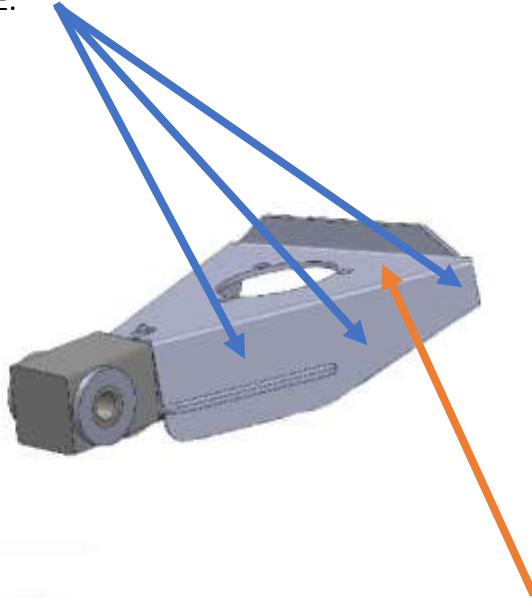

TO MEET THIS REQUIREMENT, THEY CAN ALSO BE DRILLED THROUGH THE TOP OF THE COUPLER IF YOUR TRAILER FRAME ALLOWS.

WELDING MUST BE DONE BY A CERTIFIED WELDER.

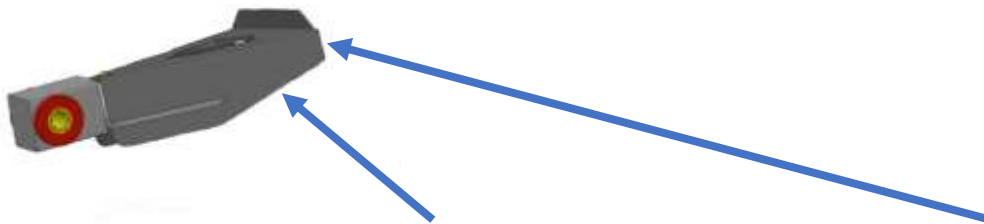

WELD ALONG THE ENTIRE BOTTOM ANGLED EDGE THAT MEETS THE FRAME, AND THE 1" STRAIGHT UP SECTION ON BOTH SIDES.

WE ALSO RECOMMEND WELDING ANY THAT CAN BE DONE ON THE TOP OF THE FRAME ALONG THE BACK EDGE OF THE MAX COUPLER MAIN BODY